
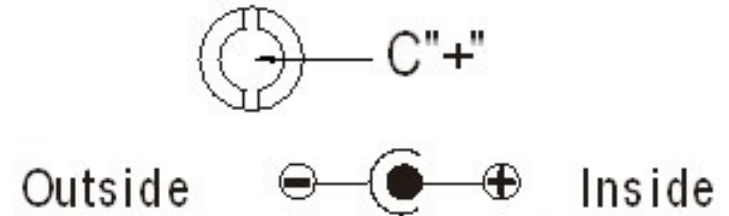


DC 轉接頭 快選表

P1J.

Pin腳定義

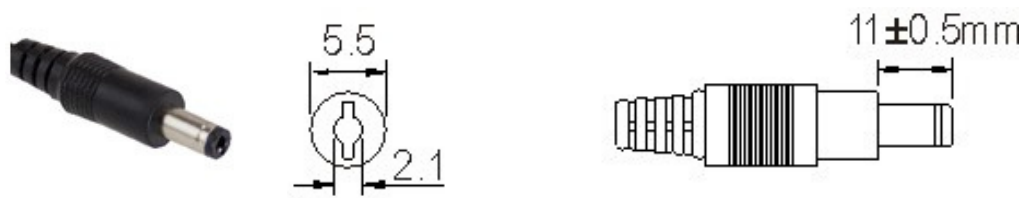

Optional DC plug: (Available in customized cable or quick adapter)

音叉DC線 (公)

品號

A
OD

B
ID

C
L

P1I

5.5

2.1

9.5

P1L

5.5

2.5

9.5

P1M

5.5

2.5

11

P1IR

5.5

2.1

9.5

P1JR

5.5

2.1

11

P1LR

5.5

2.5


9.5

P1MR

5.5

2.5

11

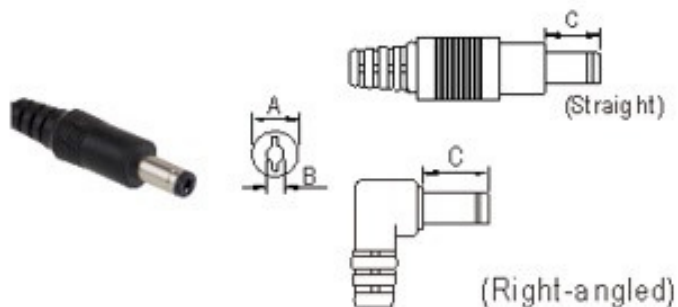










DC 轉接頭 快選表

真誠

品質

速度

服務

DC電源線 (公)		品號	A OD	B ID	C L	
   <p>EIAJ equivalent</p>		<u>P3A</u>	2.35	0.7	11	
		<u>P3B</u>	4	1.7	11	
		<u>P3C</u>	4.75	1.7	11	
DC電源線 (公)		品號	A OD	B ID	C L	D Center Pin
   <p>EIAJ equivalent</p>		<u>P4A</u>	5.5	3.4	11	1
		<u>P4B</u>	6.5	4.4	11	1.4
		<u>P4C</u>	7.4	5.1	11	0.6
帶鎖 3 腳 DIN (公)		品號	Pin腳定義			
   <p>KYCONKPPX-3P equivalent</p>	<u>R6B</u>	Pin腳編號	輸出			
		1	+Vo			
		2	-Vo			
		3	+Vo			







DC 轉接頭 快選表

真誠

品質

速度

服務

帶鎖 4 腳 DIN (公)	品號	Pin腳定義	
		Pin腳編號	輸出
   <p>KYCONK PPX-4P equivalent</p>	<p><u>R7B</u></p>	1	+Vo
		2	-Vo
		3	-Vo
		4	+Vo
5 腳 DIN (公)	品號	Pin腳定義	
		Pin腳編號	輸出
  	<p><u>R1B</u></p>	1	COM
		2	COM
		3	+5VDC
		4	-Vout
		5	+Vout